

DTD-4000 DC Tachogenerator

(Suitable for direct replacement against: E-4001)



Available in EX-STOCK.
Also available Spare
ORIGINAL Brushes.



ElectroWebStore
Electrical, Electronics & Automation Solutions

DTD-4000 (Flange mounting only)

Principle of operation:

The permanent magnet DC Tachogenerator is a rotary speed transducer, which develops DC Voltage proportional to the speed, for drive, control and measurement applications in industrial machines.

Permanent magnetic field eliminates the need of external excitation and offers extremely reliable and stable outputs. The accuracy of the Tachogenerator decides the maximum accuracy of speed of the controlled machine.

Features:

The Tachogenerator incorporates following features to ensure reliable and long service life even under harsh operating conditions:


- Silver Graphite brushes are used to ensure long life, minimum voltage drop & spark free commutation.
- Prelubricated and sealed precision ball bearings are used for long maintenance free operation.
- Brush holders, brushes designed to ensure smooth movement, equal brush tension and sparkles operation.

- Electrolytic grade copper segments moulded and machined to close tolerances in the commutator for sparkles and minimum wear. Use of mica insulation between segments to offer maximum dielectric strength and stability.
- Armature built with special grade silicon steel stampings and wound with polyester grade Class "F" Enameled wire and vacuum impregnated for high electrical and mechanical strength.
- Armature dynamically balanced for vibration free rotation, sparkles commutation and low ripple content.
- Induction hardened Shaft & key for long life.
- Flange Mounting.

Optional:

- Other Output Voltage ratings or mechanical changes are possible / available on request.
- Temperature compensation available on request.
- Suitable Flexible Couplings are available on request at extra cost.

Output Voltage (+/-5%):	0.05V/rpm (200Vdc at 4000 rpm / 50 Vdc at 1000 rpm)
Output Current:	70 mA (max.)
Speed max.:	4000 rpm
Linearity error:	<0,5%
Ripple content:	<0,5%
Armature resistance:	85 Ohms +/-3% (25°C)
Insulation Class:	F
Protection:	IP-44 (Totally enclosed)
Mounting:	Flange Mounting only
Moment of inertia:	4 x 10 ⁻⁶ Kgm ²
Brushes:	Silver Graphite (Size: 4.5 x 4.5 x 12.5mm)
Weight (approx.):	4.3 Kgs.
Colour:	Apple Green (other colours - optional)

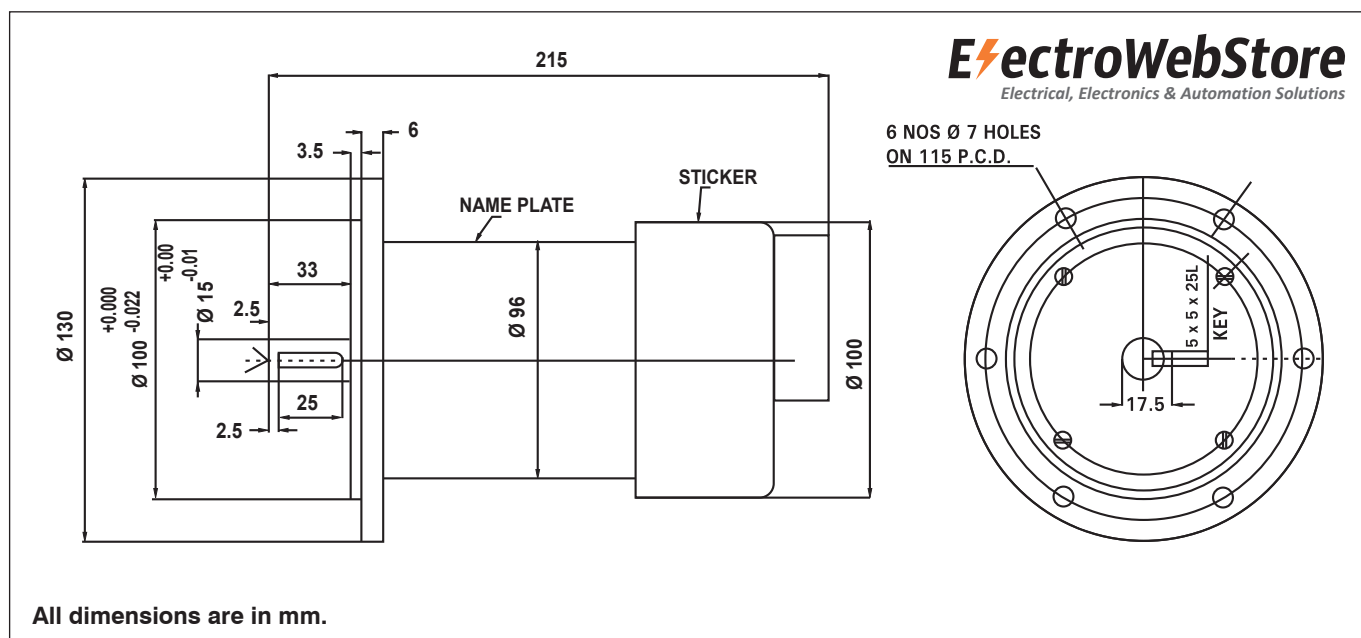

Applications:

Amusement Rides; Cable Cars / Ropeways; Cement Mills; Elevators / Lifts; Foundries / Casting Lines; Glass / Ceramic Industry; Machine Tools / S.P.M.; Material Handling Cranes; Metal Forming / Stamping Presses; Mining Bucket Excavators / Stacker Reclaimers; Paper Mills; Port Cranes; Steel Mills / Rolling Mills; Sugar Mills; Textile Machines; Transfer / Assembly Lines; Tube Mills; Tyre Presses / Rubber Moulding Machines; etc....

No part of this Catalogue may be printed or reproduced in any form without the written permission of "Shah Enterprise." All rights reserved.

ElectroWebStore
Electrical, Electronics & Automation Solutions

Marketed By:

SHAH ENTERPRISE

Sales & Correspondence Address:

605 Niranjana, 6th Floor, 99 Marine Drive,
Mumbai - 400002. Maharashtra INDIA

Authorized Indian Distributor of: Baumer Group (Hübner-Berlin; Baumer Electric; Thalheim; IVO)

Tel.: 022-66337192 / 93 / +91-7021014510 • Email: sales@electrowebstore.com

Registered Office:

293 Princess Street, #S/3 Sopariwala House,
Mumbai - 400002. Maharashtra INDIA.

Websites:

www.ElectroWebStore.com
www.BaumerDistributors.com
www.ExpressFuses.com

