



### ■ Features :

- AC input active surge current limiting
- AC input range selected by switch
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC ball bearing fan
- High power density 7.3w/inch<sup>3</sup>
- With DC\_OK signal output
- Built-in remote ON-OFF control
- Built-in remote sense function
- UL / CUL approved
- Low cost
- 2 years warranty




### SPECIFICATION

| MODEL               | SE-1000-5  | SE-1000-9  | SE-1000-12   | SE-1000-15   | SE-1000-24   | SE-1000-48 |              |
|---------------------|--|--|--------------|--------------|--------------|------------|--------------|
| OUTPUT              | DC VOLTAGE   | 5V   | 9V           | 12V          | 15V          | 24V        | 48V          |
|                     | RATED CURRENT  | 150A   | 100A         | 83.3A        | 66.7A        | 41.7A      | 20.8A        |
|                     | CURRENT RANGE  | 0 ~ 150A   | 0 ~ 100A     | 0 ~ 83.3A    | 0 ~ 66.7A    | 0 ~ 41.7A  | 0 ~ 20.8A    |
|                     | RATED POWER  | 750W   | 900W         | 999.6W       | 1000.5W      | 1000.8W    | 998.4W       |
|                     | RIPPLE & NOISE (max.) Note.2   | 150mVp-p   | 150mVp-p     | 150mVp-p     | 150mVp-p     | 200mVp-p   | 200mVp-p     |
|                     | VOLTAGE ADJ. RANGE   | 3.3 ~ 5.5V   | 7.5 ~ 10V    | 10 ~ 13.5V   | 13.5 ~ 16.5V | 22 ~ 27.5V | 43 ~ 56V     |
|                     | VOLTAGE TOLERANCE Note.3   | ±1.0%  | ±1.0%        | ±1.0%        | ±1.0%        | ±1.0%      | ±1.0%        |
|                     | LINE REGULATION  | ±0.5%  | ±0.5%        | ±0.5%        | ±0.5%        | ±0.5%      | ±0.5%        |
|                     | LOAD REGULATION  | ±1.0%  | ±0.5%        | ±0.5%        | ±0.5%        | ±0.5%      | ±0.5%        |
|                     | SETUP, RISE TIME   | 1500ms, 50ms/230VAC    1500ms, 50ms/115VAC at full load  |              |              |              |            |              |
| HOLD UP TIME (Typ.) | 20ms/230VAC    15ms/115VAC at full load  |  |              |              |              |            |              |
| INPUT               | VOLTAGE RANGE  | 90 ~ 132VAC / 180 ~ 264VAC selected by TB2    254 ~ 370VDC                                       |              |              |              |            |              |
|                     | FREQUENCY RANGE  | 47 ~ 63Hz  |              |              |              |            |              |
|                     | EFFICIENCY (Typ.)  | 81%  | 84%          | 85%          | 86%          | 88%        | 89%          |
|                     | AC CURRENT (Typ.)  | 17.5A/115VAC    10A/230VAC   |              |              |              |            |              |
|                     | INRUSH CURRENT (Typ.)  | 35A/115VAC    55A/230VAC   |              |              |              |            |              |
|                     | LEAKAGE CURRENT  | <2.5mA / 240VAC  |              |              |              |            |              |
| PROTECTION          | OVERLOAD   | 105 ~ 125% rated output power<br>Protection type : Shut down o/p voltage, re-power on to recover |              |              |              |            |              |
|                     | OVER VOLTAGE   | 5.75 ~ 6.75V   | 10.4 ~ 12.2V | 13.8 ~ 16.2V | 18 ~ 21V     | 28 ~ 32.4V | 57.6 ~ 67.2V |
|                     | OVER TEMPERATURE   | Shut down o/p voltage, recovers automatically after temperature goes down                        |              |              |              |            |              |
| FUNCTION            | DC_OK SIGNAL   | PSU turn on:3.3V ~ 5.6V    PUS turn off:0 ~ 1V   |              |              |              |            |              |
|                     | REMOTE CONTROL   | RC+/RC-: 0 ~ 0.8V power on; 4 ~ 10V power off  |              |              |              |            |              |
| ENVIRONMENT         | WORKING TEMP.  | -20 ~ +60°C (Refer to "Derating Curve")  |              |              |              |            |              |
|                     | WORKING HUMIDITY   | 20 ~ 90% RH non-condensing   |              |              |              |            |              |
|                     | STORAGE TEMP., HUMIDITY  | -40 ~ +85°C, 10 ~ 95% RH   |              |              |              |            |              |
|                     | TEMP. COEFFICIENT  | ±0.05%/°C (0 ~ 50°C)   |              |              |              |            |              |
|                     | VIBRATION  | 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes                                     |              |              |              |            |              |
| SAFETY              | SAFETY STANDARDS   | UL62368-1, BSMI CNS14336-1, EAC TP TC 004 approved   |              |              |              |            |              |
|                     | WITHSTAND VOLTAGE  | I/P-O/P:3KVAC    I/P-FG:2KVAC    O/P-FG:0.5KVAC  |              |              |              |            |              |
|                     | ISOLATION RESISTANCE   | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH                                       |              |              |              |            |              |
| OTHERS              | MTBF   | 424.5K hrs min.    Telcordia SR-332 (Bellcore) ; 251.6K hrs min.    MIL-HDBK-217F (25°C)         |              |              |              |            |              |
|                     | DIMENSION  | 278*127*63.5mm (L*W*H)   |              |              |              |            |              |
|                     | PACKING  | 2.5Kg; 6pcs/16Kg/1.38CUFT  |              |              |              |            |              |
| NOTE                | <p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. By using UVP circuit, PSU will not turn on direct by in AC continue ON/OFF condition within 5 sec.</p> <p>5. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>6. This power supply does not meet the harmonic current requirements outlined by EN61000-3-2. Please do not use this power supply under the following conditions:</p> <p>a) the end-devices is used within the European Union, and</p> <p>b) the end-devices is connected to public mains supply with 220Vac or greater rated nominal voltage, and</p> <p>c) the power supply is:</p> <ul style="list-style-type: none"> <li>- installed in end-devices with average or continuous input power greater than 75W, or</li> <li>- belong to part of a lighting system</li> </ul> <p>Exception:</p> <p>Power supplies used within the following end-devices do not need to fulfill EN61000-3-2</p> <p>a) professional equipment with a total rated input power greater than 1000W;</p> <p>b) symmetrically controlled heating elements with a rated power less than or equal to 200W</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a></p> |  |              |              |              |            |              |

**Mechanical Specification**

Case No. 935B Unit:mm

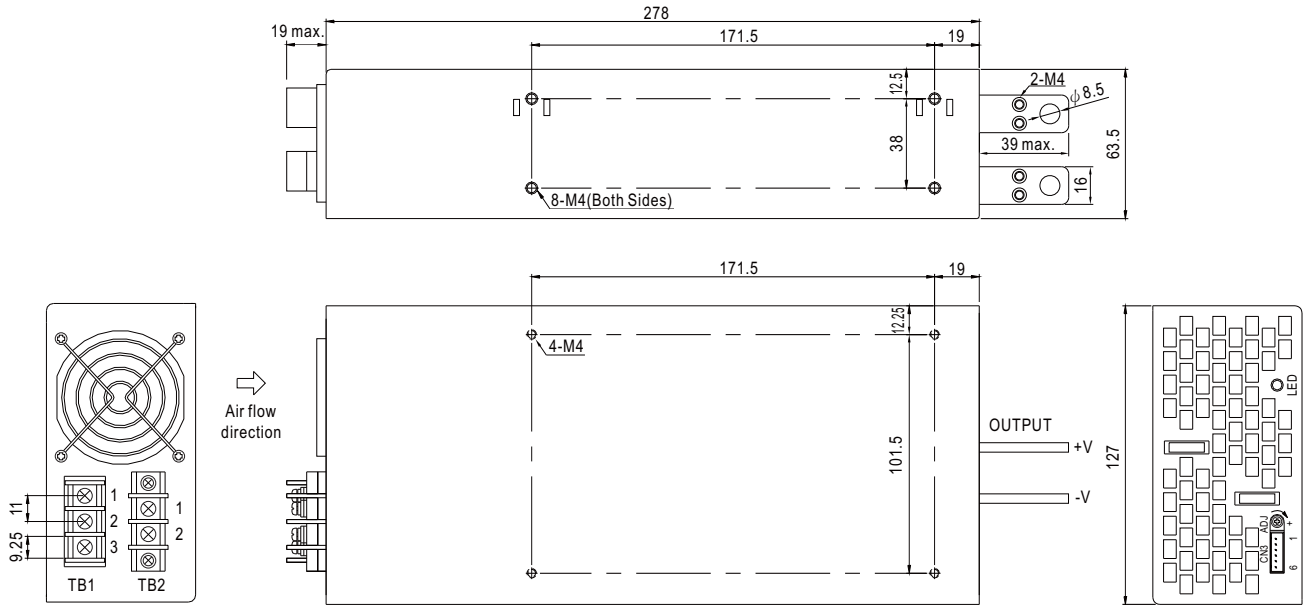

TB1:AC input terminal

| Pin No. | Assignment |
|---------|------------|
| 1       | AC/L       |
| 2       | AC/N       |
| 3       | FG $\perp$ |


TB2:110/220V Change

| Pin No. | 110V  | 220V |
|---------|-------|------|
| 1       | Short | Open |
| 2       |       |      |


Control Pin (CN3) : JST B6B-XH or equivalent

| Pin No. | Assignment   | Pin No. | Assignment | Mating Housing        | Terminal                   |
|---------|--------------|---------|------------|-----------------------|----------------------------|
| 1       | DC_OK Signal | 4       | +S         | JST XHP or equivalent | JST SXH-001T or equivalent |
| 2       | DC_OK GND    | 5       | RC-        |                       |                            |
| 3       | -S           | 6       | RC+        |                       |                            |


**Block Diagram**

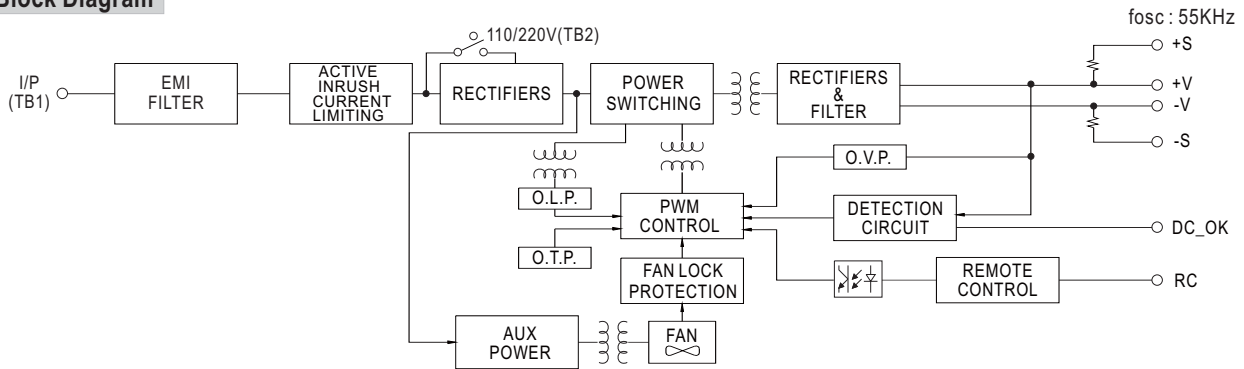

**Derating Curve**

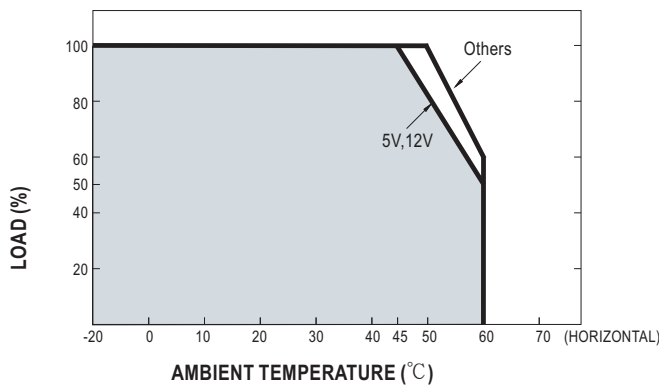

**Static Characteristics**

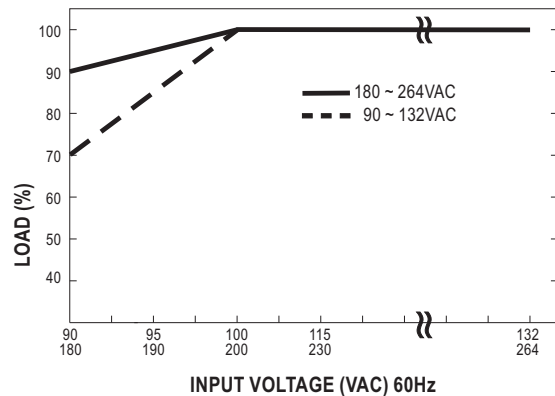

**Mechanical Specification**


**DC\_OK Signal**

DC\_OK Signal is the voltage difference between "DC\_OK" and "G" pin output


DC\_OK Signal is a TTL level signal

PSU turn on: 3.3 ~ 5.6V

PSU turn off: 0 ~ 1V

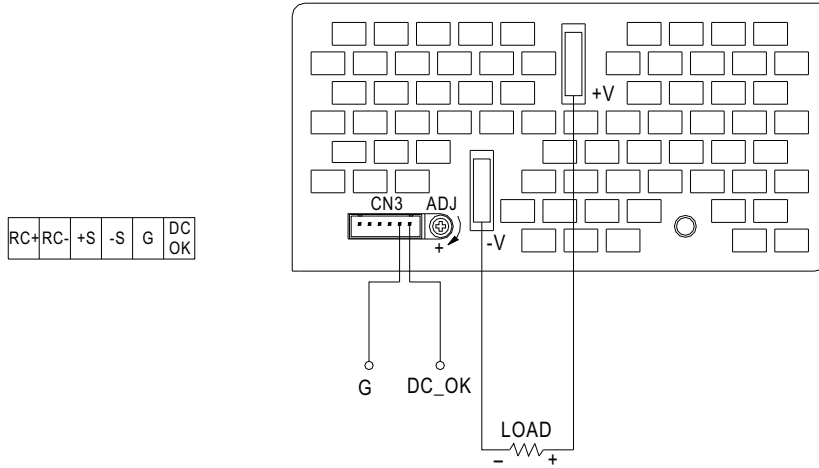

**Remote Sensing**

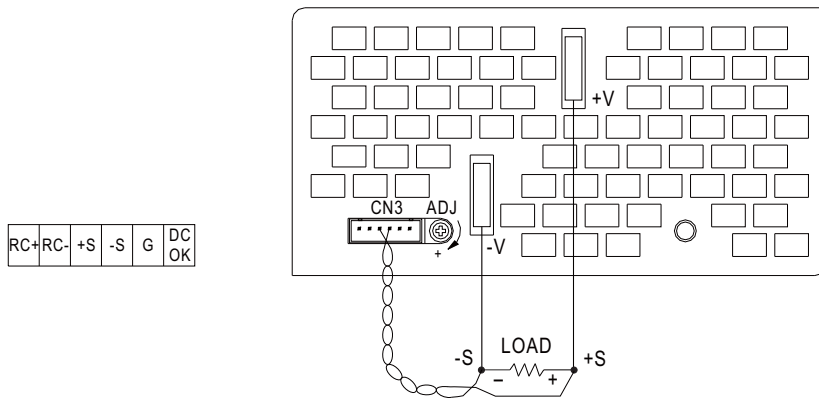

**Remote Control**

| Between RC+ and RC- | Output |
|---------------------|--------|
| SW OFF(0 ~ 0.8V)    | ON     |
| SW ON(4 ~ 10V)      | OFF    |

